
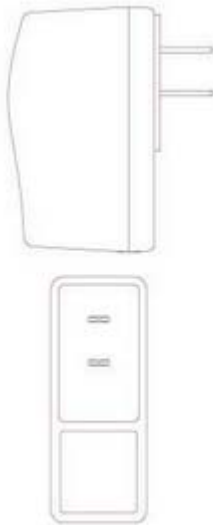


## Model Name: 3A-161WUxx

### Features:

- Universal AC Input 90 ~ 264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- Safety: UL, cUL, CB, FCC

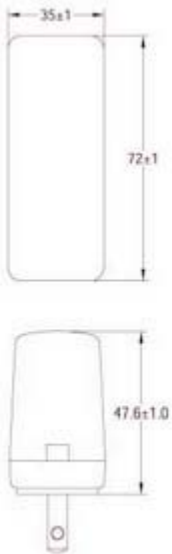

Model No.	Output	Additional Safety
3A-161WU05	5V 2.6A	PSE (IV)
3A-161WU06	6V 2.5A	PSE (IV)
3A-161WU07	7V 2.14A	PSE
3A-161WU09	9V 1.66A	PSE
3A-161WU12	12V 1.25A	PSE (IV)
3A-161WU15	15V 1A	PSE
3A-161WU18	18V 0.825A	(IV)
3A-161WU20	20V 0.75A	
3A-161WU24	24V 0.625A	(IV)

### Specification:

Input	Voltage	AC 90V – 264V Universal full range
	Frequency	47 - 63Hz
	Current	600mA
	Leakage Current (max)	<0.25mA
Others	Start up time	<1000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0–40°C; Storage: -10 – +75°C
	Humidity	Operating: 20% – 85%; Storage: 10% – 95% (Non Conversing)
M.T.B.F	50K Hours	
Safety	UL60950-1, CSA C22.2 No.60950-1, EN 60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15
		EN55022, EN61000-3
	EMS	EN 50024 (EN61204-3)
		EN61000-4