


# RXD 4140 *KEELOQ* Code Hopping Decoder 4CH RECEIVER

1. POWER SUPPLY: +5V±0.1V DC
2. CURRENT CONSUMPTION: 4~6 mA
3. FREQUENCY: 433.92MHz
4. BAND WIDTH: ±1MHz
5. SENSITIVITY: -102dBm
6. OPERATION TEMPERATURE: -20°C ~+80°C
7. RECOMMAND ANTENNA LENGTH: 15.0~17.5 cm 5.9~6.9 inch AWG20 WIRE
8. SECURITY CODE: KEELOQ CODE HOPPING TECHNOLOGY
9. UP TO FOUR TRANSMITTERS CAN BE LEARNED
10. 4 CHANNEL OUTPUT:
11. TRANSMITTER LEARNING:

PRESS LEARNING SWITCH TILL VT LED ON, MEANS SYSTEM IN LEARNING MODE. PRESS SWITCH ONCE AGAIN, VT LED WINK ONCE, PRESS ANY BUTTON ON 1<sup>ST</sup> TRANSMITTER. VT LED WINK ONCE AGAIN TO CONFIM LEARNING SUCCESS. PRESS LEARNING SWITCH TWICE, VT LED WINK TWICE, PRESS ANY BUTTON ON 2<sup>ND</sup> TRANSMITER. VT LED WINK TWICE TO CONFIM LEARNING THE 2<sup>ND</sup> TRANSMITTER SUCCESS. SAME PROCESS TO LEARNING TRANSMITTER UP TO 4 TRANSMITTERS.

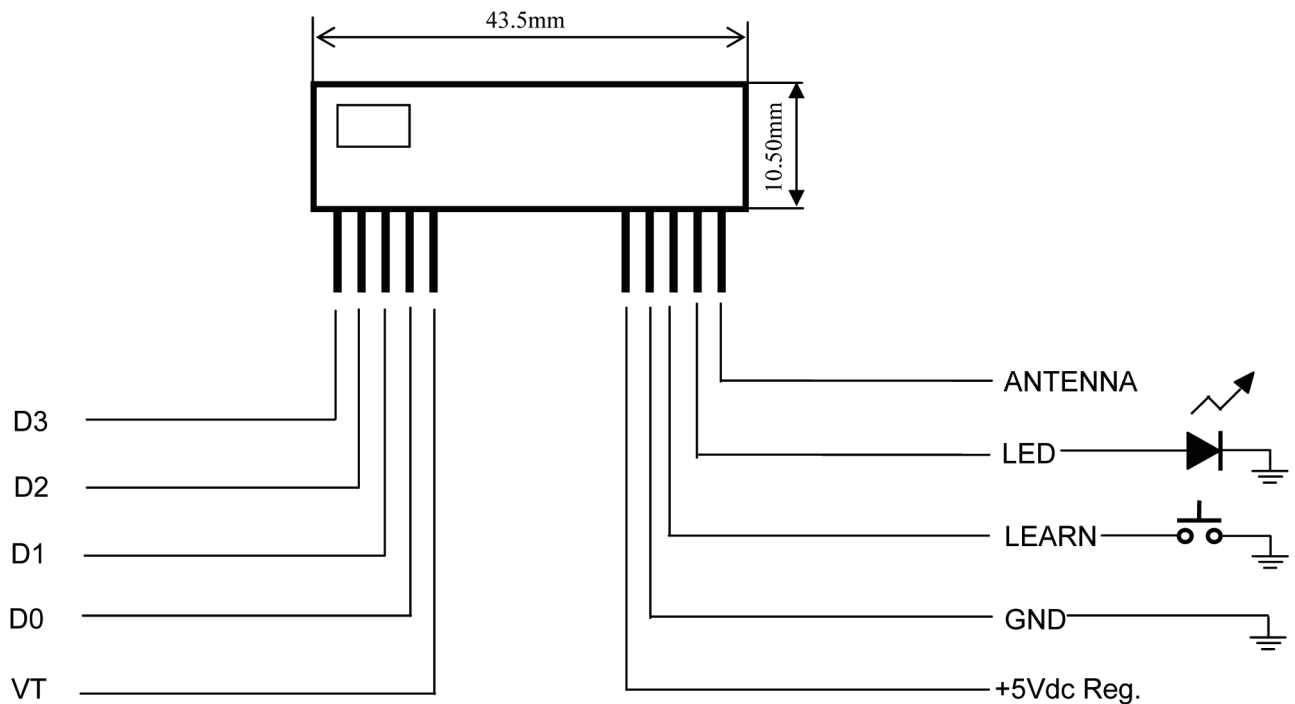

Remark	Qty.	No.	Sign	Date	Remark	Qty.	No.	Sign	Date
Draft BY									
Check By									
Approval By									
<b>RXD4140</b>									
						Page	Total page		
						1	1		